
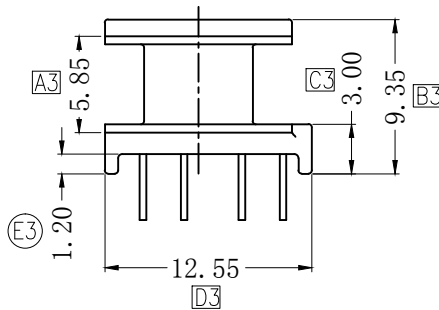





REV.	REVISIONS REC.	DATE
A/1	[1]处由8.08改为8.1	20/03/2019
	[2]处由4.88改为3.9	20/03/2019
	[3]处由1.60改为1.00	20/03/2019
	[4]处由0.50改为0.90	20/03/2019
	[5]处4个R0.2改为R0.5	20/03/2019
A/2	[A1]尺寸11.35±0.15改为11.35 ^{+0.1} _{-0.15}	22/06/2020

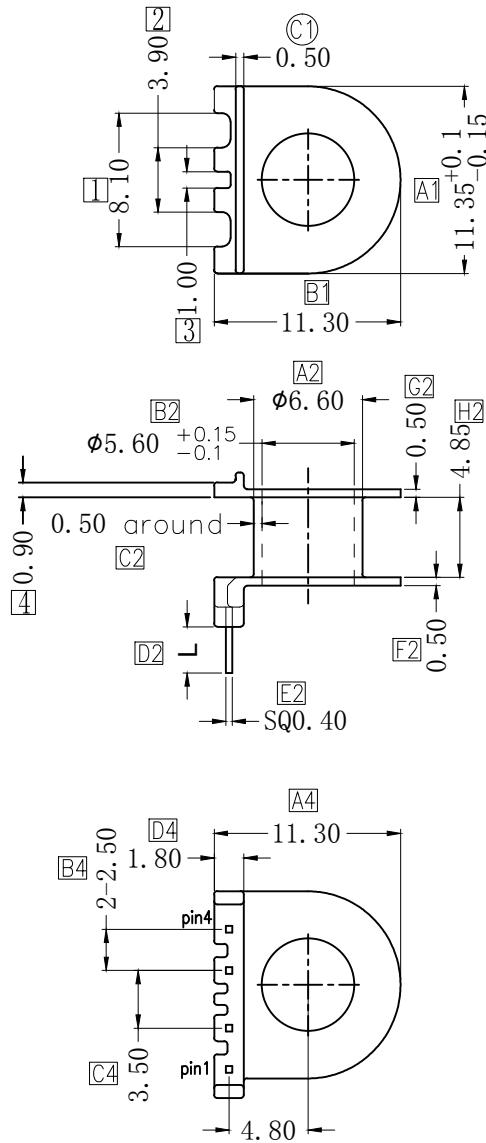

NOTE:

1. 材质: PM9820 (UL94V-0, UL No. E41429)
2. 颜色: 黑色
3. 铁芯型号: EP14
4. PIN材质: 3/4H CP WIRE, SQ0.4±0.02mm
5. 需符合超越《环境关联物质管理规范》
6. 毛边最大为0.05mm
7. ** 为主要尺寸, ⊗ 为次要尺寸, 其他未标示尺寸为参考尺寸, ** 主要尺寸, IQC入料时需有检测记录, 共18个
8. PIN拉力要求: 焊前0.8KG min 焊后1.2KG min
9. 最小壁厚: 0.40mm

 深圳市搏思康电子有限公司 SHENZHEN BOSCOM ELECTRONICS CO., LTD		型 号 MODEL NAME		产品编号 DRAWING NO	
		EP-14 (4P)		B-1407	
ADDRESS	深圳市观澜街道石马径社区君新路 石三工业区146号	MATERIAL	PM-9820	PIN MATERIAL:	符合ROHS/HF要求
		SCALE	FIT	CP WIRE	符合UL94V-0标准
TELEPHONE	0755-28032969 28032970 28032971	DRWN BY	22/06/2020	TOLERANCE	
FAX	0755-28032965	DESIGNED	庄永委	0<L<1 ±0.06 1<L<4 ±0.10 4<L<16 ±0.15 16<L<63 ±0.20 63<L<250 ±0.30	
		APPROVED		壁厚: ±0.06 PIN径: ±0.02	