


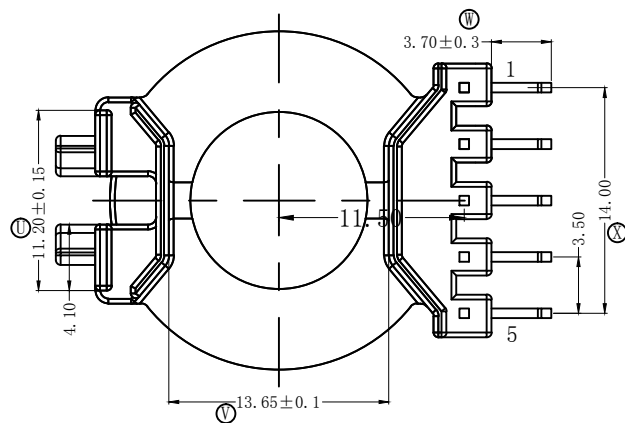
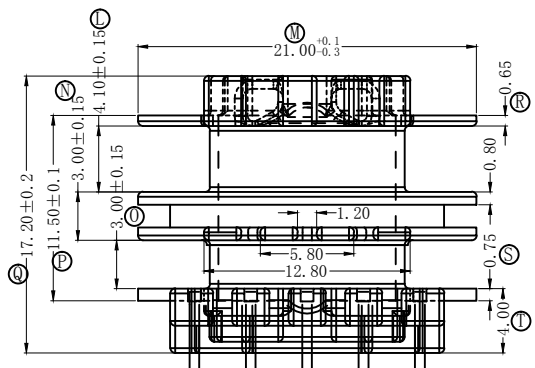
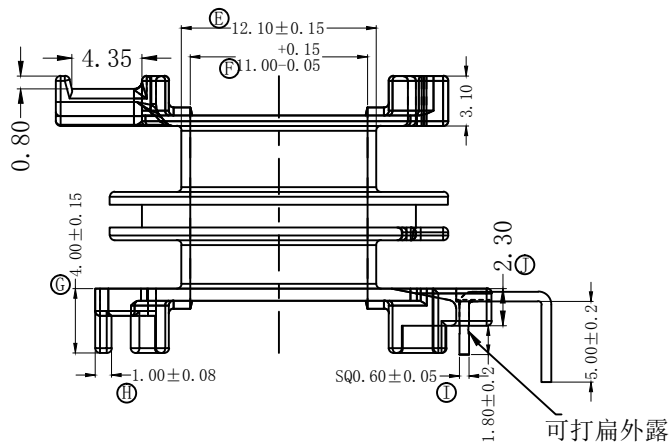
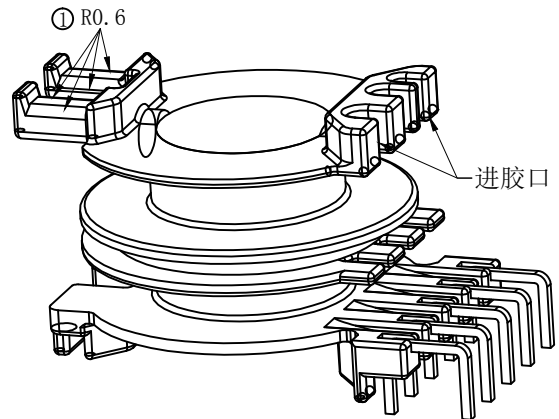


版本	A/2	REV.	REVISIONS REC.	DATE
		A/1	中间有一个一片增加4个出线槽	2017. 11. 18
			Q尺寸由17.9改为17.2, T尺寸由4.7改为4.0	2017. 11. 18
			E尺寸由12.5改为12.1, W尺寸由2.1改为3.7	2017. 11. 18
			C尺寸由24.6改为26.9	2017. 11. 18
	A/2		①处原R0.3改为R0.6	2019. 08. 13

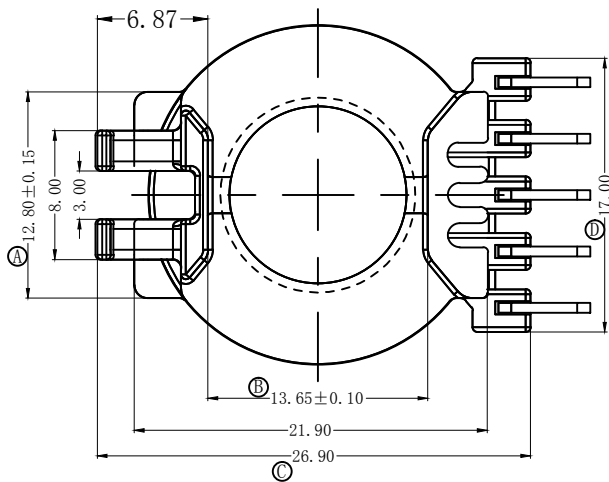

1. 材质: PM-9630
2. 耐压: 4.0KV/1.5mA/60S
3. 焊锡: 450° ±10℃ 3SEC
4. Pin焊前拉力: 1.0KG MIN
Pin焊后拉力: 1.5KG MIN
5. 强度: 任意一点强度须1.5kg MIN
6. Pin来回90° 弯折一次无折断, 龟裂
7. 量产模



深圳市搏思康电子有限公司

SHENZHEN BOSCOM ELECTRONICS CO.,LTD

ADDRESS	深圳市观澜街道石马径社区君新路 石三工业区146号	RM-10 (5P)		B-1044	
		MATERIAL	PM-9630	PIN MATERIAL: CP WIRE	符合ROHS/HF要求 符合UL94V-0标准
		SCALE	FIT	TOLERANCE	
TELEPHONE	0755-28032969 28032970 28032971	DRWING	13/08/2019	0<L≤4 ±0.10	
FAX	0755-28032965	DESIGNED	庄永委	4<L≤16 ±0.20 壁厚: ±0.10	
		APPROVED		16以上 ±0.30 PIN径: ±0.05	