




		版本	A/0
REV.	REVISIONS REC.	DATE	

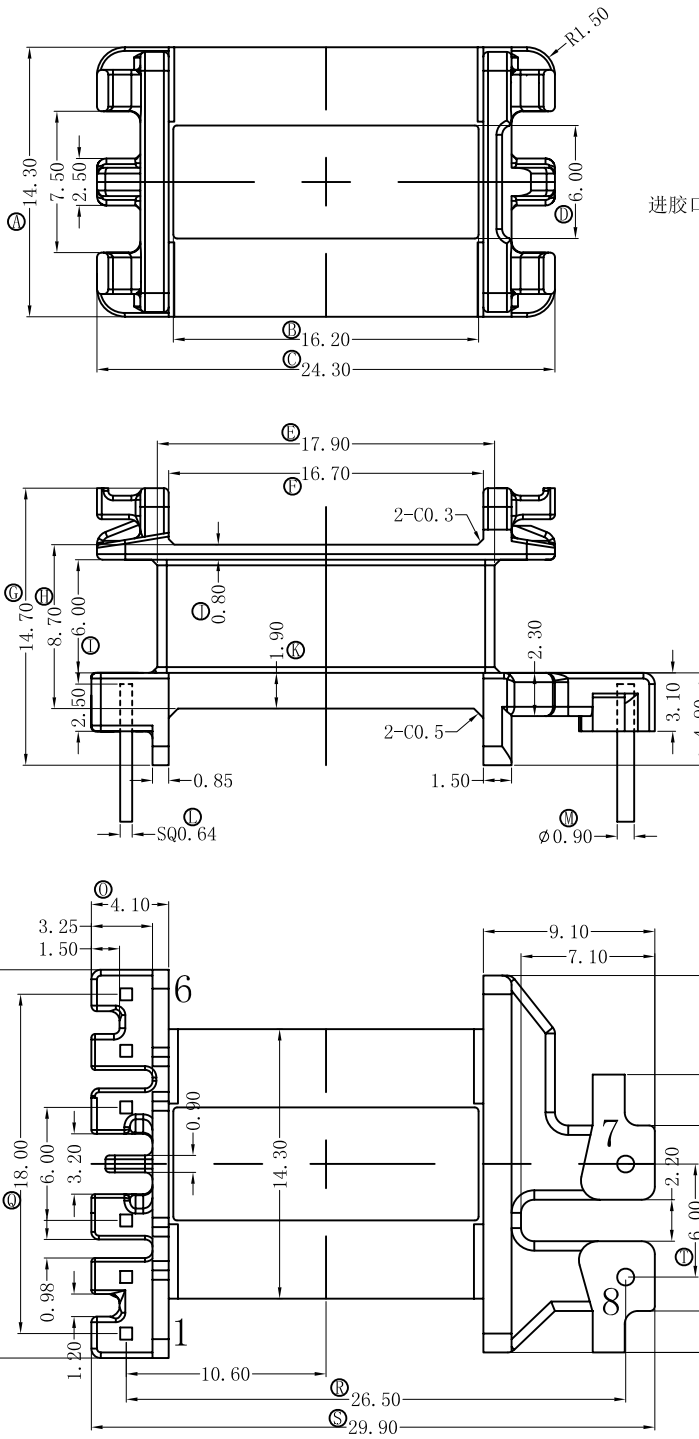

Technical drawing of the EF-20 (6+2P) connector showing top, side, and front views with dimensions. Key dimensions include: Top view (14.30, 7.50, 22.50, 16.20, 24.30, R1.50, 6.00); Side view (17.90, 16.70, 2-C0.3, 0.80, 1.90, 2.30, 2-C0.5, 1.50, 0.85, SQ0.64, 14.70, 8.70, 6.00, 2.50, 3.10, 4.90, 0.90); Front view (9.10, 7.10, 2.20, 9.84, 14.74, 20.00, 26.50, 29.90, 10.60, 1.20, 0.98, 3.20, 6.00, 18.00, 20.60, 4.10, 3.25, 1.50, 0.90, 14.30).

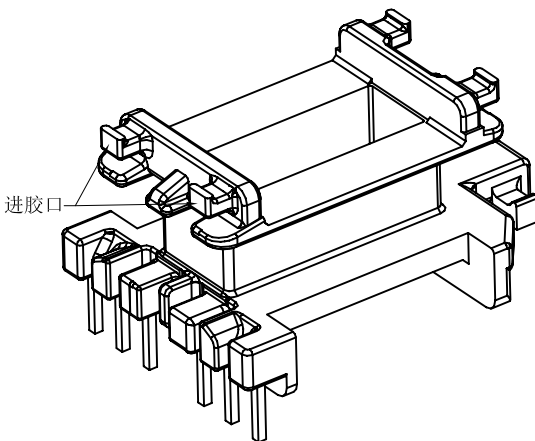

3D perspective view of the connector showing the inlet port (进胶口) and pin details. Dimensions include R1.00, C0.3, 7.40, PL±0.2, and R1.00.

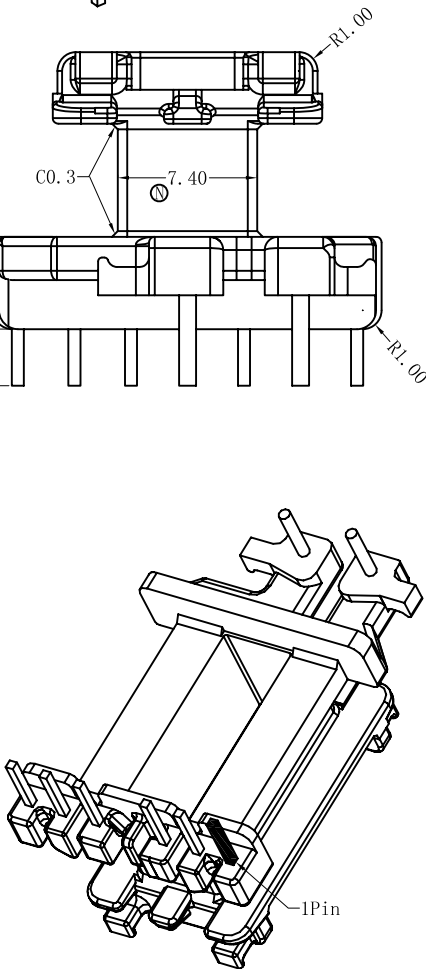

3D perspective view of the connector showing the pin details and 1Pin label. Dimensions include R1.00, 1Pin, and 20.00.

 深圳市搏思康电子有限公司 SHENZHEN BOSCOM ELECTRONICS CO., LTD		型 号 MODEL NAME		产 品 编 号 DRAWING NO	
		EF-20 (6+2P)		B-2083	
ADDRESS	深圳市观澜街道石马径社区君新路 石三工业区146号	MATERIAL	PM-9823	PIN MATERIAL:	符合ROHS/HF要求
		SCALE	FIT	CP WIRE	符合UL94V-0标准
TELEPHONE	0755-28032969 28032970 28032971	DRWN BY	30/09/2018	TOLERANCE	
FAX	0755-28032965	DESIGNED	庄永委	0<L≤4 ±0.10	
		APPROVED		4<L≤16 ±0.2	
				16<L≤64 ±0.30	
				x>64 ±0.40	
				壁厚: ±0.06 PIN径: ±0.02	